
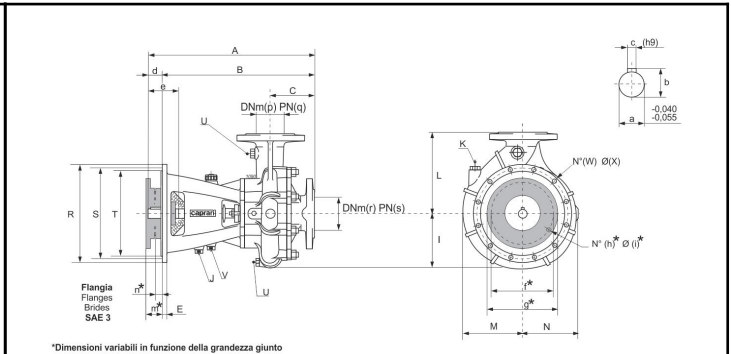


Customer:		Ref.:	
Item	Quantity	Required flow	n.d.
Type	CENTRIFUGAL PUMP WITH HORIZONTAL SHAFT	Model	MEC-AG1/125A

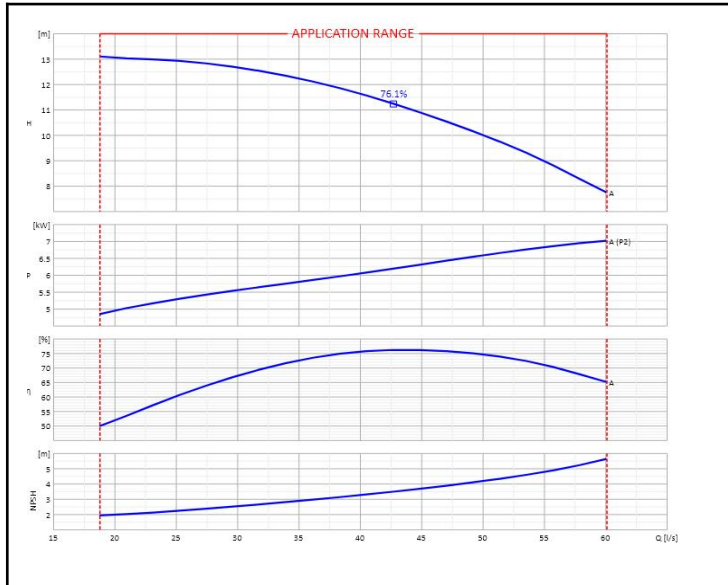

Dimensions [mm]							
A	573	N	180	b	38		
B	553	R	451	c	10		
C	164	S	428.6	d	20		
E	20	T	409.6	e	86		
I	205	U	G 3/8"	p	125		
J	G 3/8"	V	G 1/2"	q	16		
K	G 3/8"	W	12	r	150		
L	300	X	11.5	s	16		
M	227	a	35				

OPERATING DATA- ISO 9906:2012 3B -					CONSTRUCTION CHARACTERISTICS				
Q [l/s]	H [m]	P [kW]	η [%]	NPSH [m]	UNI delivery flange DN		125	PN	16
					UNI suction flange DN		150	PN	16
					Total weight		126		Kg
					No. Stages		1		
					Pump seal		Packing		
					Type of installation		Horizontal		

OPERATING LIMITS			OPERATING CHARACTERISTICS			
Pumped liquid	Water		Service flow rate		n.d.	n.d.
Max. temperature of pumped liquid	n.d.		Service head		n.d.	n.d.
Maximum density	1	kg/dm ³	Qmin	Qmax	18.78	60.09
Maximum viscosity	1	mm ² /s	H (Q=0) Hmax (Qmin)		12.99	13.09
Max. solid content	20	g/m ³	P2 Duty Point	P2max	n.d.	7.01
Max. no. starts/hr	n.d.		Pump hydraulic efficiency		n.d.	n.d.
Maximum operating time with closed port	10min (2650rpm) [40°C]		Rotation speed		1450	1/min
			Sense of rotation (*)		Clockwise	
			Number of pumps installed		Operating	Stand-by
					1	0

PUMP MATERIALS	
Delivery casing	Cast iron
Suction casing	Cast iron
Impeller	Cast iron
Stuffing box	Cast iron
Wear ring	Cast iron
Deflector	Rubber
Packing	Ribbon cable in GORE
Mechanical seal	n.d.
Feather key	Steel
Lantern bracket	Cast iron
Pto shaft guard	Stainless steel
Pump shaft	Stainless steel
V seal ring	Rubber
Bearing	n.d.

Notes:	(*) View from motor coupling side
OFFER No.	Pos.
	Date 16/01/2020