
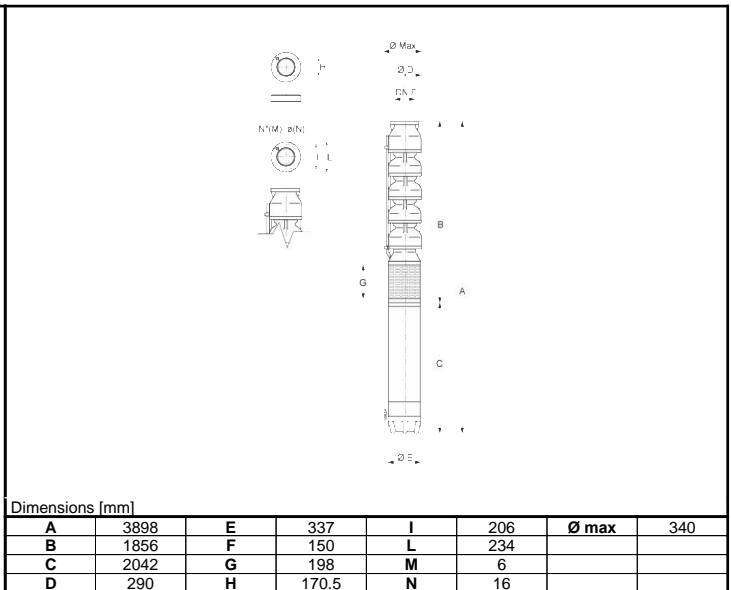


<b>Customer:</b>		<b>Ref.:</b>	
Item	Quantity	Required flow	n.d.
Type	SUBMERSIBLE ELECTRIC PUMP	Model	E12S58/7A+M14380-8V

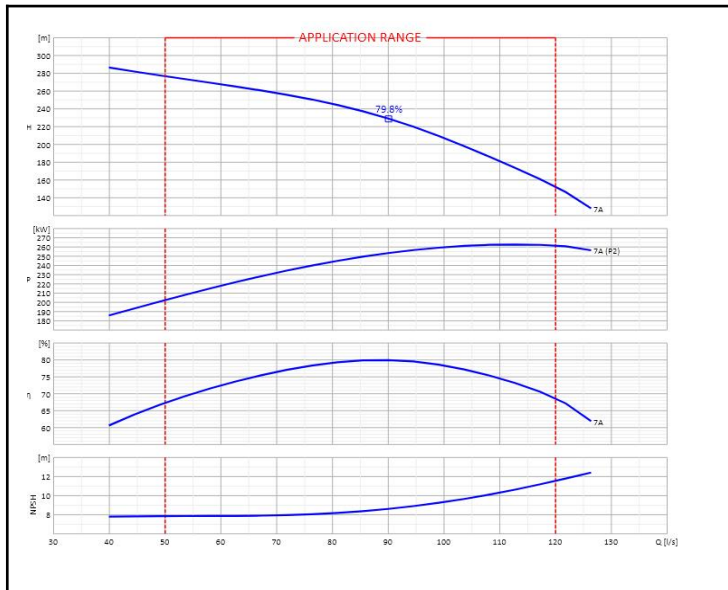

OPERATING DATA- ISO 9906:2012 3B -					CONSTRUCTION CHARACTERISTICS		
Q [l/s]	H [m]	P [kW]	η [%]	NPSH [m]			
					Delivery diameter	150	mm
					Max. overall diameter	340	mm
					Weight of electric pump	1103	Kg
					No. Stages	7	
					Motor seal	Mechanical	
					Type of installation	Vertical	

OPERATING LIMITS					PUMP MATERIALS		
Pumped liquid		Water			Diffuser unit	Cast iron	
Max. temp. of pumped liquid (*)		25	°C		Suction casing	Nodular cast iron	
Maximum density		1	kg/dm³		Impeller	Cast iron	
Maximum viscosity		1	mm²/s		Shaft	Stainless steel	
Maximum solid content		40	g/m³		Coupling		
Max. number of starts/hr		3			Pump shaft bearing bush	Stainless steel/rubber	
Minimum immersion depth		850	mm		Valve casing	Cast iron	
OPERATING CHARACTERISTICS					Strainer	Stainless steel	
Service flow rate		n.d.		n.d.	Wear ring	Steel	
Service head		n.d.		n.d.			
Qmin	Qmax	50	120	l/s	MOTOR MATERIALS		
H (Q=0)	Hmax (Qmin)	322.1	276.36	m	Shaft	Stainless steel	
Power consumption at duty point		n.d.		n.d.	Upper bracket	Cast iron	
Pump efficiency	Overall efficiency	n.d.	n.d.	n.d.	Rotor	Electrical steel	
Max. pump efficiency (B.E.P.)		79.8		n.d.	Stator	Electrical steel	
Sense of rotation (**)		Anticlockwise			Stator shell	Stainless steel	
Number of pumps installed		Operating		Stand-by	Winding	PE2+PA	
		1		0	Lower bracket	Cast iron	
ELECTRIC MOTOR CHARACTERISTICS					Mechanical seal	Silicon carbide/silicon carbide	
Nominal power		280		kW	Bearing bush	Bronze	
Rated frequency		50		Hz	Thrust-bearing	Brass/Synthetic compound	
Rated voltage		400		V	Thrust-bearing foot slip	Nodular cast iron	
Rated current		522.8		A	Diaphragm	Rubber	
No. Poles	Nominal speed	2	2955	1/min	Shaft sleeve	Chrome plated steel	
Insulation class	Protection class	n.d.		IP68	Motor bracket	Nodular cast iron	
Certified motor for use with drinking water							

<b>Notes:</b>	(*) Speed of the water outside the jacket of the motor v=0.3 m/s		
	(**) View from delivery port.		
	In case of VSD operation, refer to Use and Maintenance Instructions of the electric pump.		
OFFER No.		Pos.	Date
			16/01/2020