
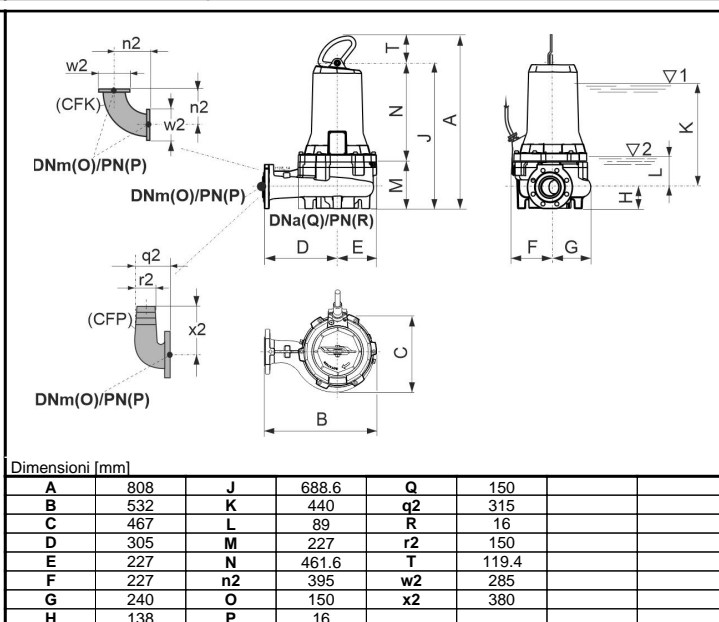


<b>Customer:</b>		<b>Ref.:</b>	
Item	Quantity	Required flow rate	n.d.
Type	SUBMERSIBLE ELECTRIC PUMP FOR WASTE WATER	Model	KCM150LA+004061N3

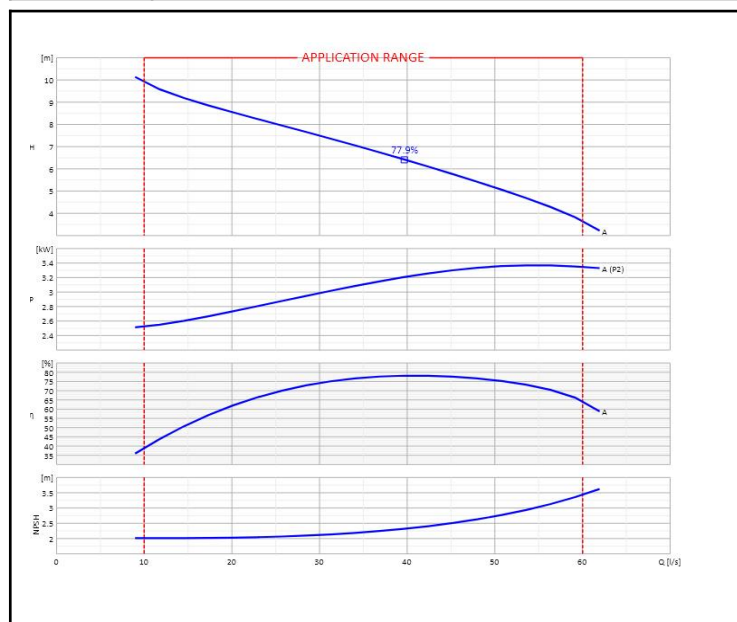

OPERATING DATA- ISO 9906:2012 3B -					CONSTRUCTION CHARACTERISTICS			
Q [l/s]	H [m]	P [kW]	η [%]	NPSH [m]	Delivery diameter	150	mm	
					Type of Impeller	Single channel		
					Moment of inertia	0.20128 Kg·m²		
					Electric pump weight	Installation	167.8	Kg
					Seal on pump side	Motor side	Mechanical	Mechanical
					Type of installation	n.d.		
					Operation	Continuous (S1)		

OPERATING LIMITS				OPERATING CHARACTERISTICS			
Pumped liquid	Waste water			Service flow rate	n.d.	n.d.	****
Max. temperature of pumped liquid	40	°C		Service head	n.d.	n.d.	
Maximum density	1	kg/dm³		H (Q=0)	Hmax	12.41	9.92
Maximum viscosity	1	mm²/s		Qmin	Qmax	10	60
Max. solid content	4	%		Power consumption at duty point	n.d.		
Max. number of starts/hr	20			Max power consumption	3.36		
Free passage	100	mm		Pump efficiency	Overall	n.d.	n.d.
Minimum immersion depth	440	mm		Sense of rotation (*)	Clockwise		
ELECTRIC PUMP MATERIALS				Number of pumps installed	Operating	Stand-by	
					1	0	

Flange for mechanical seal	Nodular cast iron	ELECTRIC MOTOR CHARACTERISTICS			
Support bearing	Cast iron				
Cable clamp	Stainless steel	Nominal power	4	kW	
Motor casing	Cast iron	Rated frequency	50	Hz	
Stator	Electrical steel	Rated voltage	400	V	
Complete shaft with rotor	Stainless steel/Magnetic steel	Rated current	9	A	
Conductivity probe	n.d.	No. Poles	6	970	1/min
Oil centrifuge	Technopolymer	Type of motor	3 ~		
Round power cable	n.d.	Efficiency 4/4-3/4-2/4 (**)	84,8 - 86,1 - 83,9 %		
Delivery body	Cast iron	Power factor 4/4-3/4-2/4	0,755 - 0,665 - 0,515		
Impeller	Cast iron	Is/In	5.8	Ts/Tn	n.d.
Ring impeller seat	Steel/Rubber	Thermal protection	Klixon		
Mechanical seal on pump side	silicon carbide/ceramic	Insulation class	H		
Oil box	Cast iron	Protection class	IP68		
Mechanical seal on motor side	Ceramic/graphite	Explosion-proof	n.a.		
Screws and nuts	Stainless steel	Power supply cable	Length	NSSHO	10
		Efficiency class	S.F	IE3	n.d.

<b>Notes:</b>	(*) Viewed from motor coupling side; (**) Efficiency testing method according to IEC60034-2-1		
OFFER No.	Pos.	Date	
		16/01/2020	