
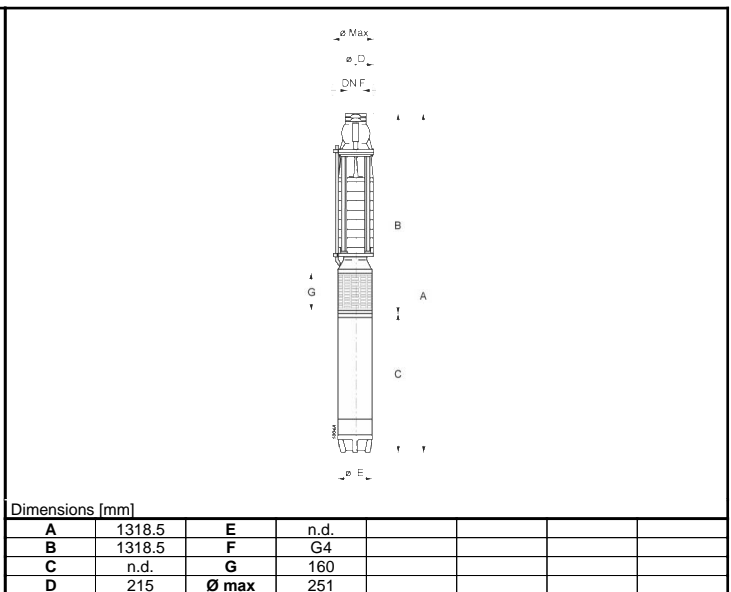


Customer:		Ref.:	
Item	Quantity	Required flow	n.d.
Type	SUBMERSIBLE ELECTRIC PUMP	Model	E10R40/8+MPC10100A-8V

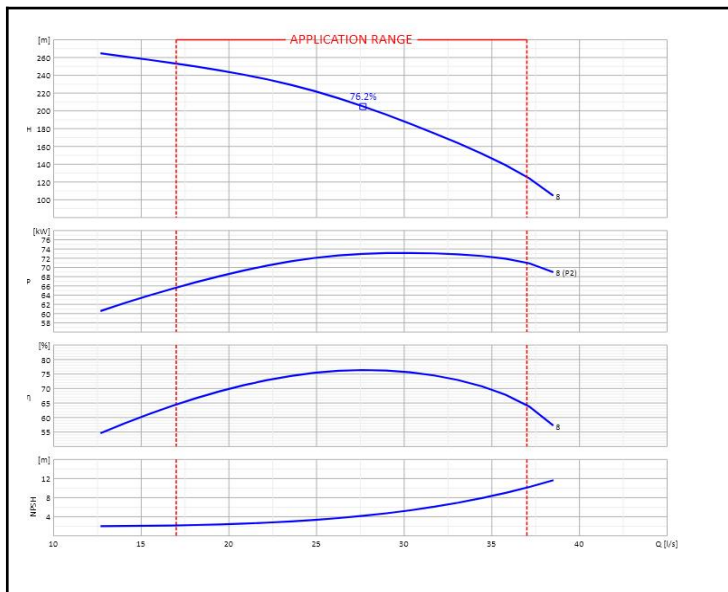

OPERATING DATA- ISO 9906:2012 3B -					CONSTRUCTION CHARACTERISTICS		
Q [l/s]	H [m]	P [kW]	η [%]	NPSH [m]			
					Delivery diameter	G4	n.d.
					Max. overall diameter	251	mm
					Weight of electric pump	406.6	Kg
					No. Stages	8	
					Motor seal	Mechanical	
					Type of installation	Vertical	

OPERATING LIMITS				PUMP MATERIALS			
Pumped liquid		Water		Delivery casing		Cast iron	
Max. temp. of pumped liquid (*)		25	°C	Diffuser unit		Cast iron	
Maximum density		1	kg/dm³	Suction casing		Nodular cast iron	
Maximum viscosity		1	mm²/s	Impeller		Cast iron	
Maximum solid content		40	g/m³	Shaft		Stainless steel	
Max. number of starts/hr		6		Bearing bush		Bronze	
Minimum immersion depth		627.5	mm	Coupling		Stainless steel	
OPERATING CHARACTERISTICS				Valve casing		Cast iron	
Service flow rate		n.d.		Strainer		Stainless steel	
Service head		n.d.		Shaft sleeve		Stainless steel	
Qmin	Qmax	17	37	MOTOR MATERIALS			
H (Q=0)	Hmax (Qmin)	299.68	252.69				
Power consumption at duty point		n.d.		Shaft		Stainless steel	
Pump efficiency		n.d.		Sand guard		Rubber	
Overall efficiency		n.d.		Rotor		Electrical steel	
Max. pump efficiency (B.E.P.)		76.2		Stator		Electrical steel	
Sense of rotation (**)		Anticlockwise		Stator shell		Stainless steel	
Number of pumps installed		Operating		Winding		PPC	
		1		Stand-by		0	
ELECTRIC MOTOR CHARACTERISTICS				Lower bracket		Cast iron	
Nominal power		75 kW		Mechanical seal cover		Stainless steel	
Rated frequency		50 Hz		Mechanical seal		Silicon carbide/silicon carbide	
Rated voltage		400 V		Bearing		Graphite	
Rated current		146.7 A		Thrust-bearing		Stainless steel/Synthetic	
No. Poles	Nominal speed	2	2925 1/min	Thrust-bearing foot slip		Cast iron	
Insulation class	Protection class	n.d. IP68		Diaphragm		Rubber	
<i>Uncertified motor for use with drinking water</i>				Diaphragm cover		Cast iron	
				Upper bracket		Cast iron	

Notes:	(*) Speed of the water outside the jacket of the motor v=0.5 m/s		
	(**) View from delivery port.		
	In case of VSD operation, refer to Use and Maintenance Instructions of the electric pump.		
OFFER No.		Pos.	Date
			16/01/2020