
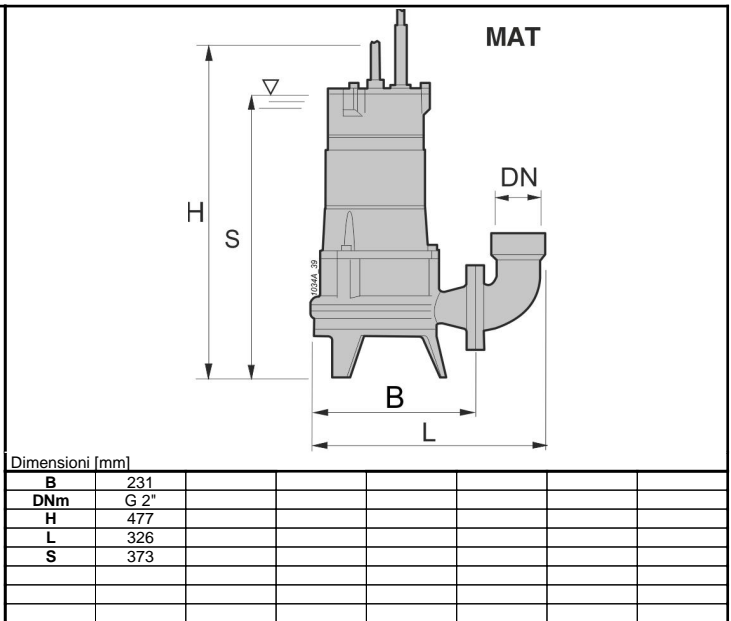


Customer:		Ref.:	
Item	Quantity	Required flow rate	n.d.
Type	SUBMERSIBLE ELECTRIC PUMP FOR WASTE WATER	Model	MAT11M2-230V

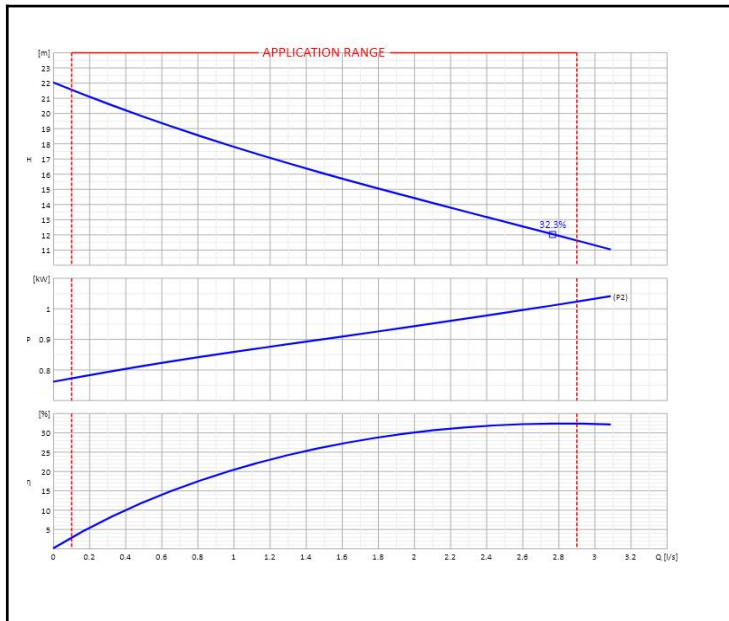

OPERATING DATA- ISO 9906:2012 3B -					CONSTRUCTION CHARACTERISTICS			
Q [l/s]	H [m]	P [kW]	η [%]	NPSH [m]	Delivery diameter		G 2" n.d.	
					Type of Impeller		With shredder	
					Moment of inertia		n.d.	
					Electric pump weight	Installation	35.75	Kg
					Seal on pump side	Motor side	Mechanical	Mechanical
					Type of installation	n.d.		
					Operation	Continuous (S1)		

OPERATING LIMITS			OPERATING CHARACTERISTICS			
Pumped liquid	Waste water		Service flow rate		n.d.	n.d.
Max. temperature of pumped liquid	40	°C	Service head		n.d.	n.d.
Maximum density	1	kg/dm³	H (Q=0)	Hmax	0	21.55
Maximum viscosity	1	mm²/s	Qmin	Qmax	0.1	2.9
Max. solid content	n.d.	%	Power consumption at duty point		n.d.	n.d.
Max. number of starts/hr	20		Max power consumption		1.02	kW
Free passage	n.d.	mm	Pump efficiency	Overall	n.d.	n.d.
Minimum immersion depth	n.d.	n.d.	Sense of rotation (*)		Clockwise	
ELECTRIC PUMP MATERIALS			Number of pumps installed		Operating	Stand-by
					1	0

ELECTRIC PUMP MATERIALS		ELECTRIC MOTOR CHARACTERISTICS			
Mechanical seal on motor side	Ceramic/graphite	Nominal power		1.1	kW
Round power cable	n.d.	Rated frequency		50	Hz
Stator	Electrical steel	Rated voltage		230	V
Shaft with rotor	Stainless steel/Magnetic steel	Rated current		6.8	A
Impeller	Cast iron	No. Poles	Rotation speed	2	2800
Mechanical seal on pump side	Silicon carbide/silicon carbide	Type of motor		1 ~	
Shredder	Stainless steel	Efficiency 4/4		73 %	
Delivery casing	Cast iron	Power factor 4/4			
Duck foot pedestal	Cast iron	Is/In	Ts/Tn	n.d.	n.d.
		Thermal protection			
		Insulation class		F	
		Protection class		IP68	
		Explosion-proof		n.a.	
		Power supply cable	Length	H07RN8	10
		Efficiency class	S.F	n.d.	

Notes:	(*) Viewed from motor coupling side	
OFFER No.	Pos.	Date
		16/01/2020